




# Wall Mounted Storage Rack Manual

SKU # 211-1705

Model # 30075

**DO NOT OVERLOAD.** Carefully follow all instructions. Maximum load capacity for the storage rack is 1000 lbs of evenly distributed weight - 150lbs maximum load per level of evenly distributed weight. The rack must be attached to the structural supports of the wall using the supplied mounting hardware or hardware of equivalent strength. The supporting wall must be strong enough to safely support the maximum load. Do not use hollow wall anchors to attach the storage rack to the wall. Failure to properly install the wall mounted storage rack may cause the evenly distributed load to fall. Do not stand directly on or below the rack. Do not let children play on or near the storage rack.

## Included Parts

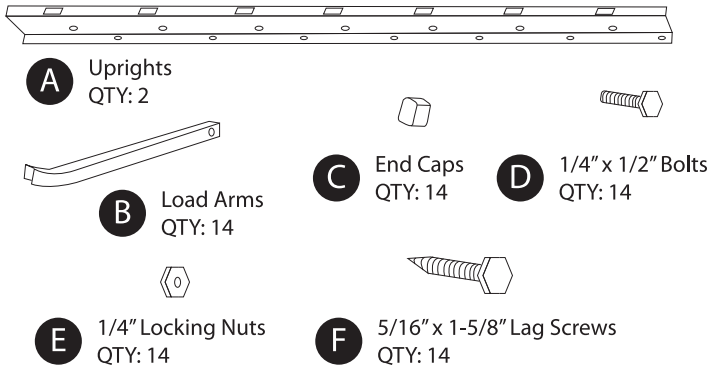


## Warranty

**ONE-YEAR LIMITED WARRANTY:** If, during normal use, this Storage Shop® product breaks or fails due to a defect in material or workmanship within one (1) year from the date of original purchase, simply bring this tool with the original sales receipt back to your nearest MENARDS® retail store. At its discretion, Storage Shop® agrees to have the product or any defective part(s) repaired or replaced with the same or similar Storage Shop® product or part free of charge, within the stated warranty period, when returned by the original purchaser with the original sales receipt. This warranty; (1) excludes expendable parts; (2) shall be void if this tool is used for commercial and/or retail purposes; and (3) does not cover any losses, injuries to persons/property or costs. This warranty does give you specific legal rights and you may have other rights, which vary from state to state.

## Assembly Step One


1. Attach one end cap (C) to the end of each load arm (B)
2. Insert the load arms (B) into the slots located on the upright (A)
3. Insert one 1/4" x 1/2" bolt (D) through each hole located on the upright (A) and through the hole located on each of the load arms (B).
4. Attach 1/4" nuts (E) to each of the 1/4" x 1/2" bolts (D). Tighten using two wrenches.
5. Repeat all four steps for the second upright.

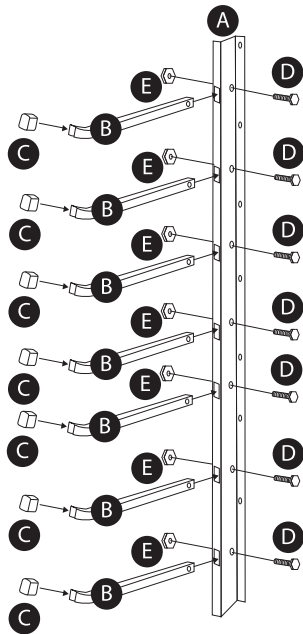

## Assembly Step Two

**CAUTION:** The storage rack must be securely attached to the structural support of the wall.

1. Place the two assembled uprights onto the support wall. Make sure the uprights are level. Mark & pre-drill fourteen 3/16" pilot holes into the wall studs\*.  
\*DO NOT ATTACH TO STEEL STUDS
2. Attach the two assembled uprights to the wall studs using fourteen 5/16" x 1-5/8" lag screws (F). Tighten lag screws securely using a wrench.
3. To attach to a concrete or brick wall, use concrete anchors (sold separately)
4. Installation is complete

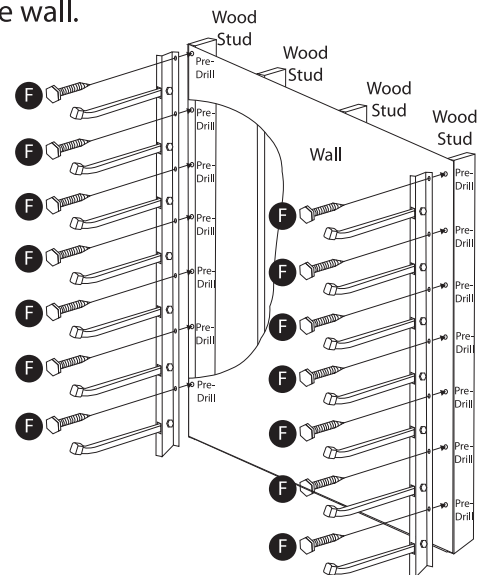

# IMPORTANT!

• INSTALLATION PROBLEMS? • INSTALLATION QUESTIONS? • NEED PARTS? • TROUBLESHOOTING?

**PLEASE DON'T RETURN THIS PRODUCT TO THE STORE**

CONTACT US FIRST

## Customer Service

### 1-800-495-9278

Monday-Friday: 8:00 am - 5:00 pm Central Time